






SELF LOADING CONCRETE MIXER

660.2
RUNNER

Technical data

GENERAL DATA		660
Output Class S1	m³	5,2
Driver's seat		Rotating
Frame		Fixed
Drum volume	l	6.850
Bucket capacity	l	600
Loading system		Rear
Unloading system		Rear
Empty weight	kg	6.900
Transmission		Hydrostatic
Cabin		Rops-Fops
ENGINE - STAGE V		
Brand		Perkins
Model		904J-E36TA
Power	kW	90
ENGINE - STAGE IIIA		
Brand		Perkins
Model		1104D-44TA
Power	kW	83
DRIVING		
Max speed	km/h	35
Gradeability	%	40
Turning radius	mm	5150
Traction		AWS
Tyres		18-19,5 16 PR
Axle oscillation lock		Optional
HYDRAULIC SYSTEM		
Hydraulic system		Double gear pump
Working pressure	bar	180
ELECTRICAL SYSTEM		
Starter motor	V/kW	12/4
Battery	V/Ah	12/50
TANK CAPACITY		
Fuel	l	150
Hydraulic	l	140
BRAKES		
Service		Hydraulic acting on both axles
Parking		Hydraulic acting on the rear axles
APPROVALS		
Road approval (Italian)		Yes

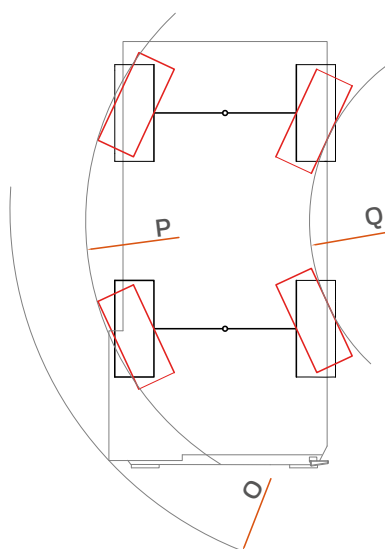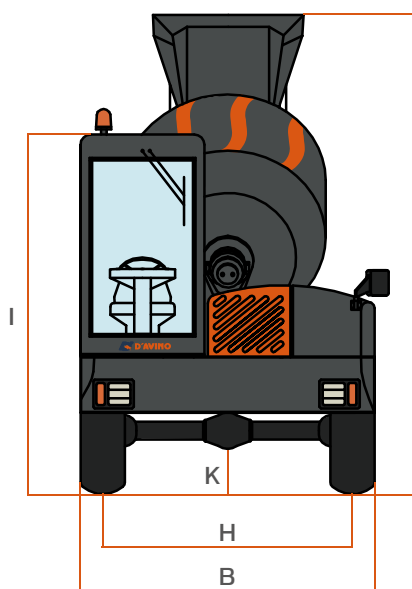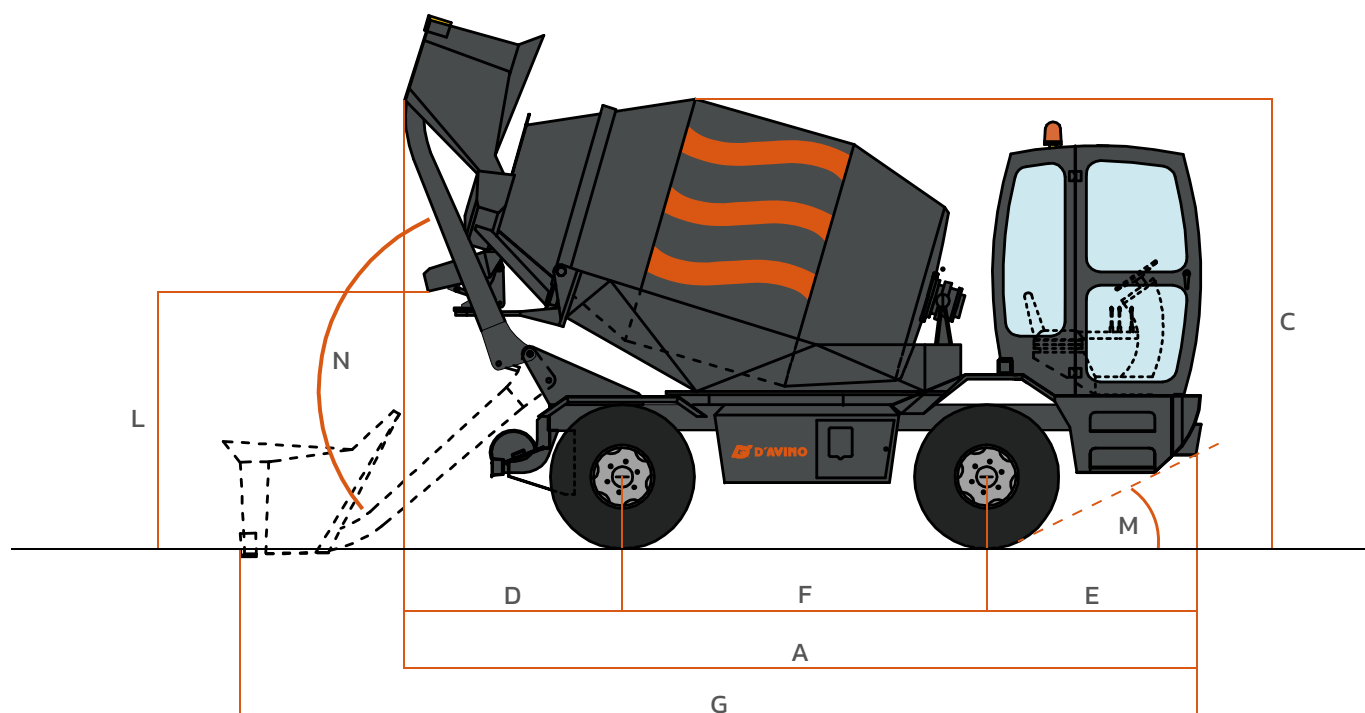

660	
A	6065
B	2385
C	3220
D	1625
E	1530
F	2910
G	7330
H	1910
I	2910
J	3850
K	385
L	1680
M	26°
N	110°
O	5150
P	4650
Q	2475



Together. Stronger. Closer



AMOG srl | I-80031 Brusciano (NA) | Tel. +39 081 658 8361 | sales@davinogroup.biz

davinodumper.com

