






SELF LOADING CONCRETE MIXER



Technical data

GENERAL DATA		R30
Output Class S1	m ³	3,0
Driver's seat		Rotating 270°
Frame		Fixed
Drum volume	l	3.700
Bucket capacity	l	500
Loading system		Front
Unloading system		Rotating 270°
Empty weight	kg	5.980
Transmission		Hydrostatic
Cabin		Rops-Fops
ENGINE - STAGE V		
Brand		Yanmar
Model		4TNV98CT
Power	kW	53,7
ENGINE - STAGE IIIA		
Brand		Perkins
Model		1104D-44T
Power	kW	74,5
DRIVING		
Max speed	km/h	25 (40 opt.)
Gradeability	%	40
Turning radius	mm	4550
Traction		AWS
Tyres		12.5/80-18 16 PR
Axle oscillation lock		Standard
HYDRAULIC SYSTEM		
Hydraulic system		Double gear pump
Working pressure	bar	180
ELECTRICAL SYSTEM		
Starter motor	V/kW	12/4
Battery	V/Ah	12/50
TANK CAPACITY		
Fuel	l	125
Hydraulic	l	125
BRAKES		
Service		Hydraulic acting on both axles
Parking		Hydraulic acting on the rear axles
APPROVALS		
Road approval (Italian)		Yes

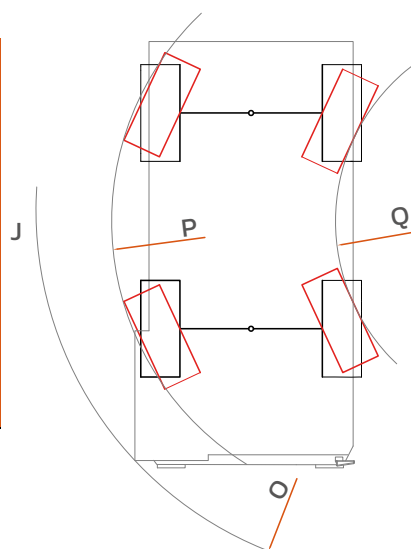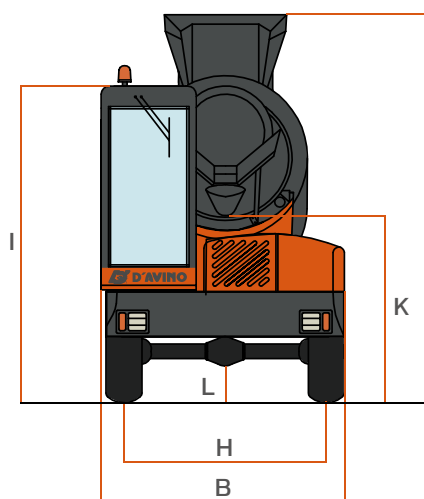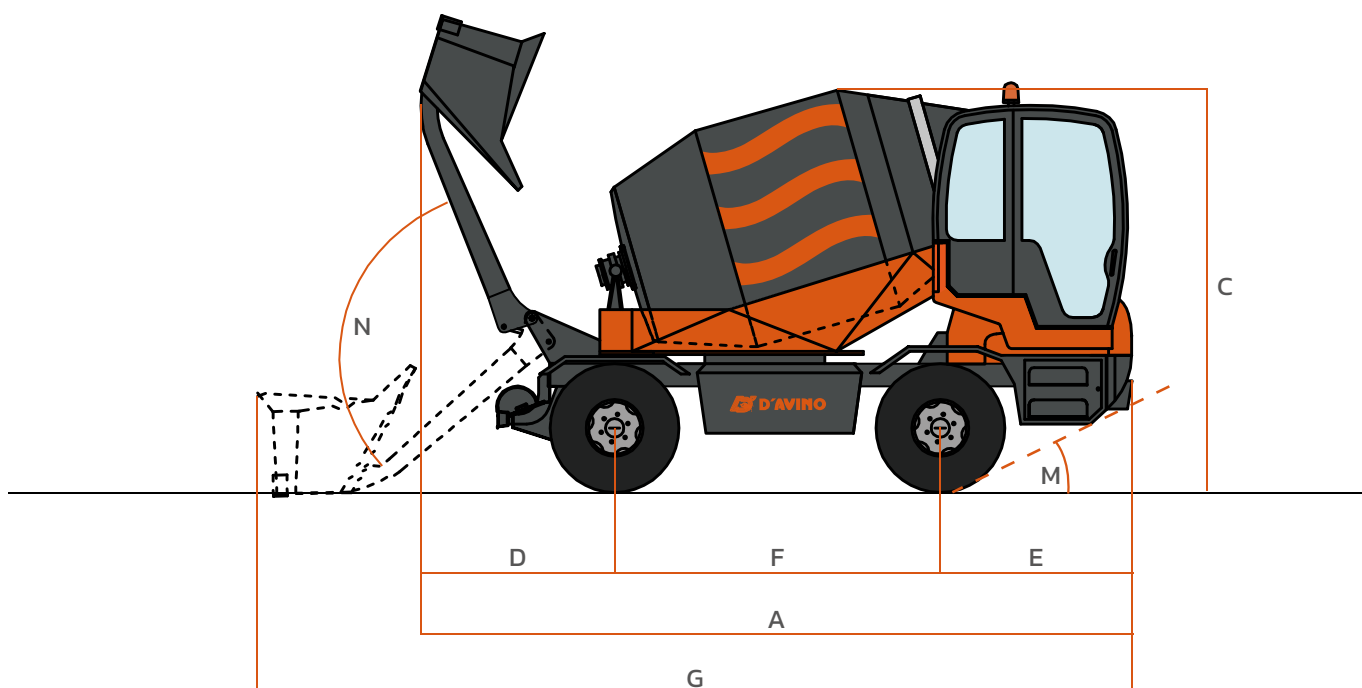

R30

A	4370
B	2260
C	2840
D	780
E	1460
F	2130
G	6860
H	1665
I	2840
J	3670
K	1440
L	300
M	30°
N	110°
O	4450
P	3850
Q	2050



Together. Stronger. Closer



AMOG srl | I-80031 Brusciano (NA) | Tel. +39 081 658 8361 | sales@davinogroup.biz

davinodumper.com

