
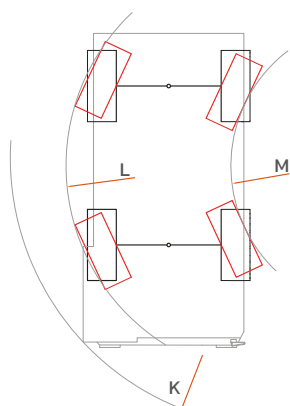


Technical data

GENERAL DATA		TC14XL	TC14	TC12
Max load capacity	kg	14.000	14.000	12.000
Drivers'seat		Fixed	Fixed	Fixed
Frame		Fixed	Fixed	Fixed
Empty weight	kg	5.700	5.400	5.200
Transmission		Hydrostatic	Hydrostatic	Hydrostatic
Cabin		Rops-Fops	Rops-Fops	Rops-Fops
ENGINE - STAGE V				
Brand		Perkins	Perkins	Perkins
Model		904J-E36TA	904J-E36TA	904J-E36TA
Power	kW	90	90	90
ENGINE - STAGE IIIA				
Brand		Perkins	Perkins	Perkins
Model		1104D-44TA	1104D-44TA	1104D-44TA
Power	kW	83	83	83
DRIVING				
Max speed	km/h	35	35	35
Gradeability	%	40	40	40
Turning radius	mm	5150	5150	5150
Traction		AWS	AWS	AWS
Tyres		500/60R22.5	500/60R22.5	18-19,5 16 PR
Axle oscillation lock		Optional	Optional	Optional
HYDRAULIC SYSTEM				
Hydraulic system		Duble gear pump	Duble gear pump	Duble gear pump
Working pressure	bar	140	140	140
ELECTRICAL SYSTEM				
Starter motor	V/kW	12/4	12/4	12/4
Battery	V/Ah	12/50	12/50	12/50
TANK CAPACITY				
Fuel	l	175	175	175
Hydraulic	l	175	175	175
BRAKES				
Service		Hydraulic acting on both axles		
Parking		Hydraulic acting on the rear axles		
APPROVALS				
Road approval (Italian)		In progress	In progress	In progress

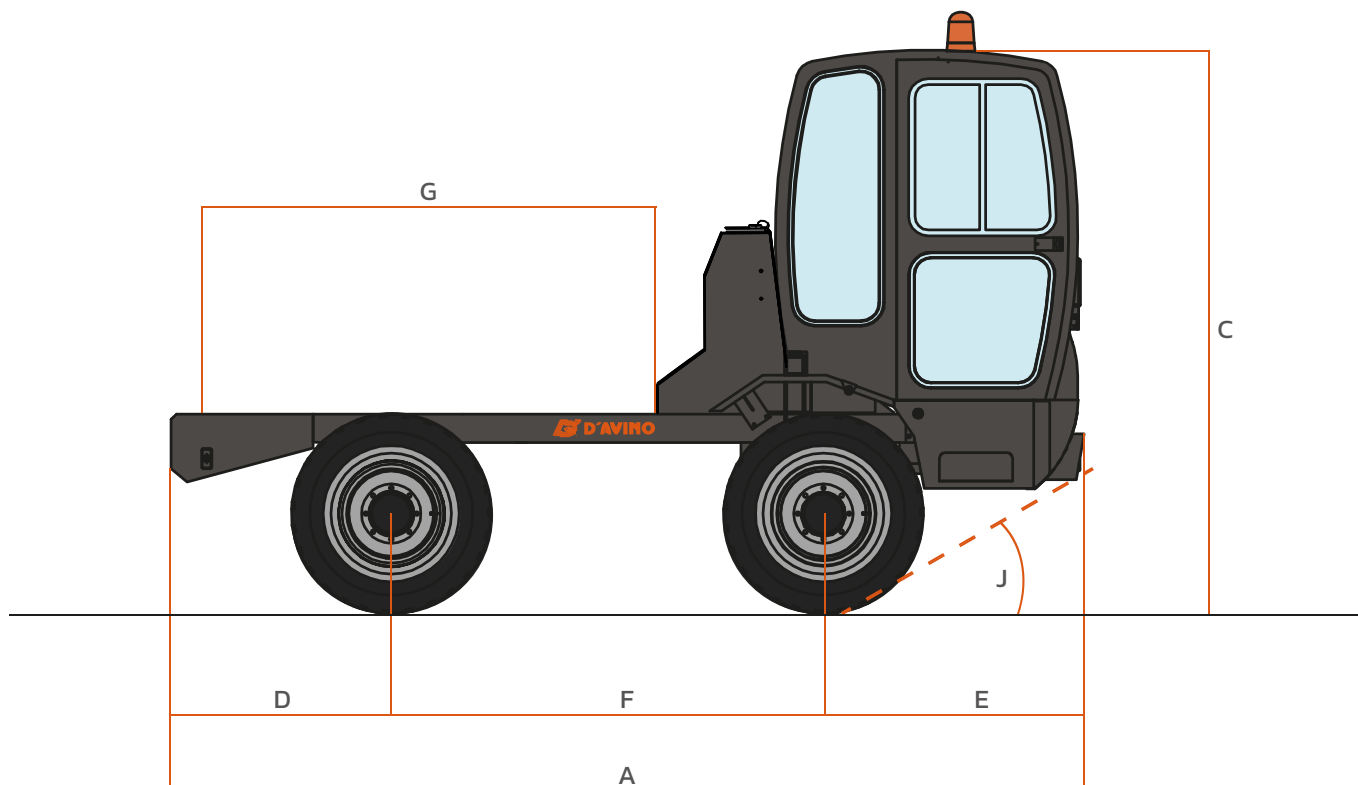

	TC14XL	TC14	TC12	TC10	TC8	TC6
A	5496	5176	5176	4500	4500	4500
B	2410	2410	2360	2000	2000	2000
C	2966	2966	2920	2780	2780	2780
D	1200	1200	1200	1085	1085	1085
E	1396	1396	1396	1285	1285	1285
F	2900	2580	2580	2130	2130	2130
G	2952	2952	2952	2300	2300	2300
H	1960	1960	1910	1665	1665	1665
I	420	420	360	300	300	300
J	27°	27°	26°	31°	31°	31°
K	5150	5150	5150	4000	4000	4000
L	4650	4650	4650	3850	3850	3850
M	2475	2475	2475	2050	2050	2050