

### Weights

Operating weight with cab and bucket (ISO 6016)	3476 kg
Transport mass (no attachment)	3312 kg
Weight reduction with canopy	-118 kg
Additional weight for cab with HVAC	19 kg
Additional weight for steel tracks	96 kg
Additional weight for long dipperstick	12 kg
Additional weight for heavy counterweight	291 kg
Ground pressure with rubber tracks	33.60 kPa

### Engine

Make / model	Kubota / D1703-M-D1-E4B-BC-2
Fuel	Diesel
Number of cylinders	3
Displacement	1642 cm <sup>3</sup>
Maximum power @ 2200 rpm (ISO 14396)	18.2 kW
Maximum torque (SAE)	97.4 Nm

### Performance

Digging force, dipperstick (ISO 6015)	20790 N
Digging force, long dipperstick (ISO 6015)	18010 N
Digging force, bucket (ISO 6015)	33430 N
Drawbar pull	34132 N
Travel speed, low range	2.6 km/h
Travel speed, high range	4.7 km/h

### Hydraulic System

Pump type	Single outlet variable displacement, load sensing torque pump with gear pumps
Total hydraulic capacity	101.20 L/min
Auxiliary flow	63.90 L/min
Auxiliary relief	206.0 bar

### Slew System

Boom swing, left	75.0°
Boom swing, right	55.0°
Slew rate	8.6 RPM

### Fluid Capacities

Cooling system	8.00 L
Engine lubrication plus oil filter	5.20 L
Fuel reservoir	52.00 L
Hydraulic reservoir	8.30 L
Hydraulic system	39.70 L

### Environmental


Noise level LpA(EU Directive 2006/42/EC)	77 dB(A)
Noise level LWA(EU Directive 2000/14/EC)	94 dB(A)
Whole body vibration (ISO 2631-1)	0.11 ms <sup>-2</sup>
Hand-arm vibration (ISO 5349-1)	0.34 ms <sup>-2</sup>

### Standard Features

1550 mm dozer blade	Horn
300 mm rubber tracks	Hydraulic joystick controls
Adjustable double acting auxiliary hydraulic (AUX1) with Quick Couplers	Proportional fingertip auxiliary and boom swing offset hydraulic control
Battery disconnect	Retractable seat belt
Blade float feature	Suspension seat with high back
Clamp ready	TOPS/ROPS/FOPS canopy * 1
Control console locks	Two-speed travel with Auto shift
Cupholder	Upper structure four-point tie down
Engine/hydraulic monitor with shutdown	Water separator
Foldable and ergonomic pedals	Work light (boom)
Full fuel warning alarm	Warranty: 12 months, 2000 hours (whichever occurs first)

1. Roll Over Protective Structure (ROPS) – Meets requirements of ISO 3471. Tip Over Protective Structure (TOPS) – Meets requirements of ISO 12117. Falling Object Protective Structure (FOPS) – Meets requirements of ISO 3449.


### Working Range

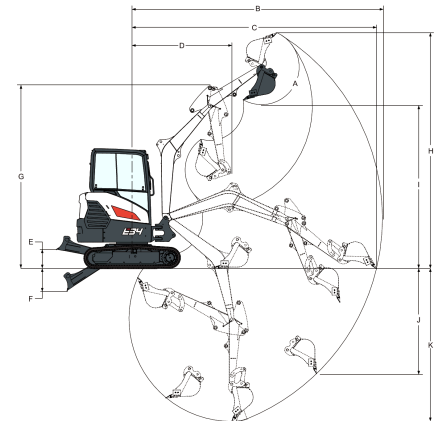

Values marked with \* - Long dipperstick

(A)	185.0°	(G)	3708.0 mm
(B)	5101.0 mm	(H)	4804.0 mm
(B)	5383.0 mm	(H*)	4985.0 mm
(C)	4980.0 mm	(I)	3340.0 mm
(C*)	5270.0 mm	(I*)	3521.0 mm
(D)	2017.0 mm	(J)	2136.0 mm
(D*)	2077.0 mm	(J)	2414.0 mm
(E)	382.0 mm	(K)	3117.0 mm
(F)	456.0 mm	(K*)	3417.0 mm

### Dimensions

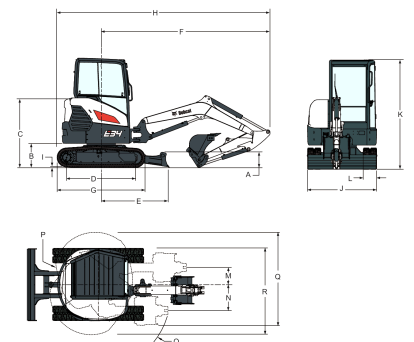

Values marked with \* - Long dipperstick

(A)	322.0 mm	(J)	1550.0 mm
(B)	540.0 mm	(K)	2468.0 mm
(C)	1557.0 mm	(L)	300.0 mm
(D)	1542.0 mm	(M)	371.0 mm
(E)	1528.0 mm	(N)	554.0 mm
(F)	3787.0 mm	(O)	1623.0 mm
(G)	1970.0 mm	(P)	1125.0 mm
(H)	4661.0 mm	(P*)	1215.0 mm
(H*)	4761.0 mm	(Q)	1982.0 mm
(I)	25.0 mm	(R)	1855.0 mm

### Options

1st AUX hydraulic on arm	Keyless ignition
2nd AUX hydraulics (boom, arm)	Klacc coupler
Air conditioning (Cab with HVAC)	LED lights set
AM/FM MP3 stereo radio	Left and right mirror
Additional lights (2+1)	Long dipperstick
Auto idle	MS03 coupler
Beacon	Object handling device (safety valves + overload warning device + lifteye)
Bobcat hydr. pin grabber	Special applications kit
Direct-to-tank-AUX1 line	Steel tracks
Dlx textile suspension seat	TOPS/ROPS/FOPS cab with heater
Fire extinguisher	Travel motion alarm
Heavy counterweight	