






SELF LOADING CONCRETE MIXER

440.2
MASTER

Technical data

GENERAL DATA		440
Output Class S1	m³	2,6
Driver's seat		Rotating
Frame		Fixed
Drum volume	l	3.700
Bucket capacity	l	600
Loading system		Rear
Unloading system		Slewing 180°
Empty weight	kg	5.500
Transmission		Hydrostatic
Cabin		Rops-Fops
ENGINE - STAGE V		
Brand		Yanmar
Model		4TNV98CT
Power	kW	53,7
ENGINE - STAGE IIIA		
Brand		Perkins
Model		1104D-44T
Power	kW	74,5
DRIVING		
Max speed	km/h	25 (40 opt.)
Gradeability	%	40
Turning radius	mm	4000
Traction		AWS
Tyres		12.5/80-18 16 PR
Axle oscillation lock		Optional
HYDRAULIC SYSTEM		
Hydraulic system		Duble gear pump
Working pressure	bar	180
ELECTRICAL SYSTEM		
Starter motor	V/kW	12/3
Battery	V/Ah	12/50
TANK CAPACITY		
Fuel	l	100
Hydraulic	l	130
BRAKES		
Service		Hydraulic acting on both axles
Parking		Hydraulic acting on the rear axles
APPROVALS		
Road approval (Italian)		Yes

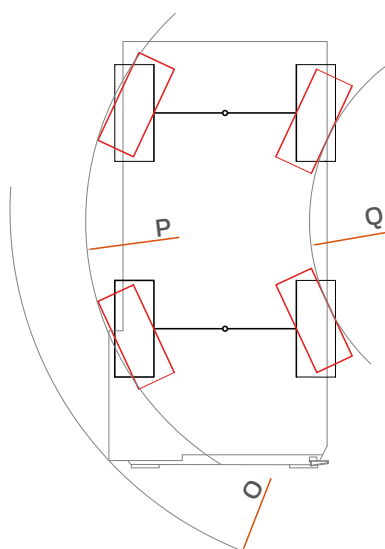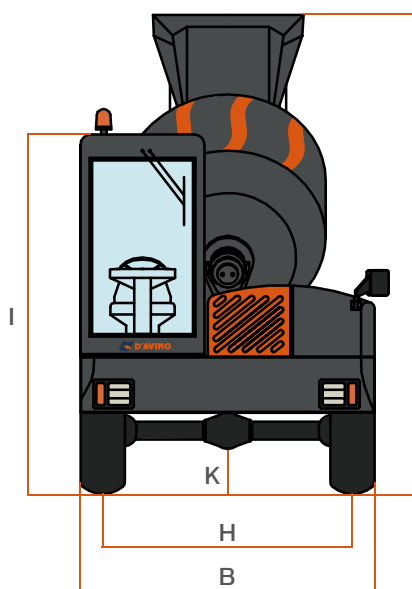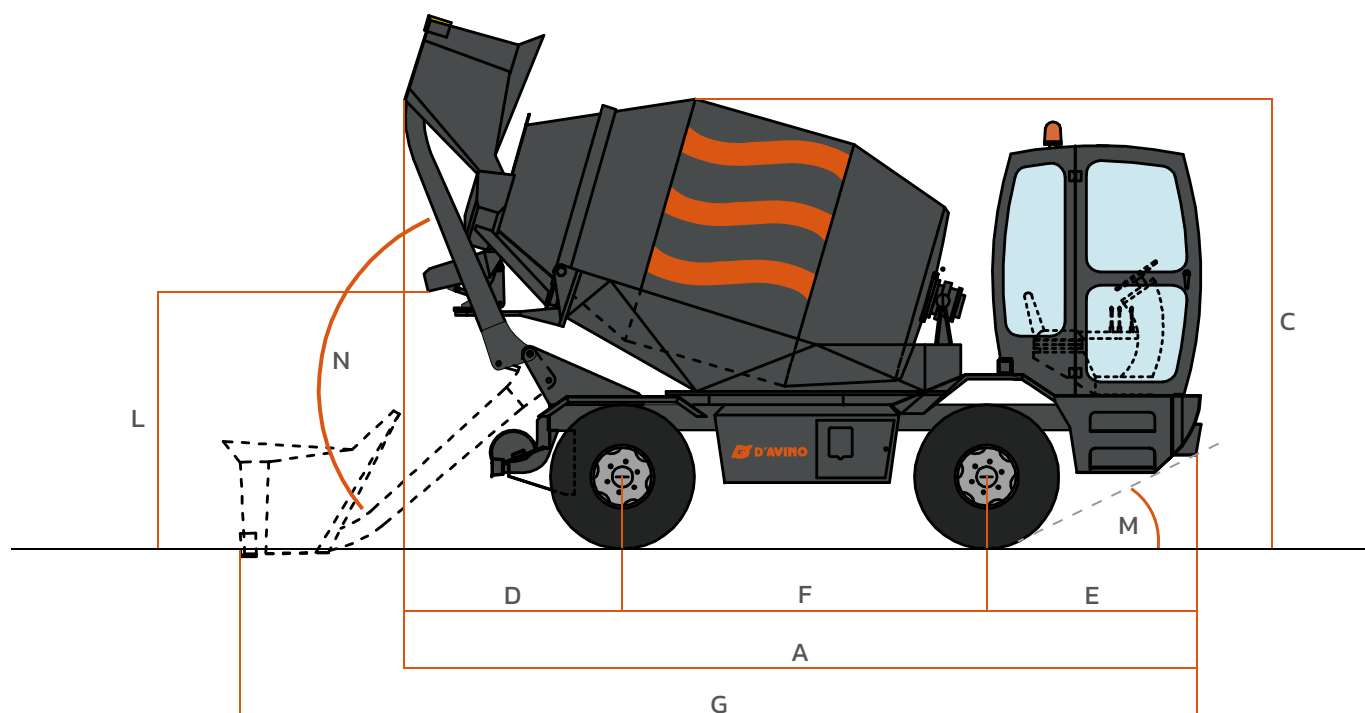

440	
A	4905
B	2000
C	2940
D	1490
E	1285
F	2130
G	6110
H	1665
I	2780
J	3720
K	300
L	1460
M	31°
N	110°
O	4000
P	3850
Q	2050



Together. Stronger. Closer



AMOG srl | I-80031 Brusciano (NA) | Tel. +39 081 658 8361 | sales@davinogroup.biz

davinodumper.com

