






SELF LOADING CONCRETE MIXER

DELTA 4

Technical data

GENERAL DATA		DELTA
Output Class S1	m ³	4,5
Driver's seat		Rotating 360°
Frame		Fixed
Drum volume	l	5.800
Bucket capacity	l	600
Loading system		Rotating 360°
Unloading system		Rotating 360°
Empty weight	kg	9.250
Transmission		Hydrostatic
Cabin		Rops-Fops
ENGINE - STAGE V		
Brand		Perkins
Model		904J-E36TA
Power	kW	90
ENGINE - STAGE IIIA		
Brand		Perkins
Model		1104D-44TA
Power	kW	83
DRIVING		
Max speed	km/h	35
Gradeability	%	40
Turning radius	mm	5120
Traction		AWS
Tyres		18-19,5 16 PR
Axle oscillation lock		Standard
HYDRAULIC SYSTEM		
Hydraulic system		Double gear pump
Working pressure	bar	180
ELECTRICAL SYSTEM		
Starter motor	V/kW	12/4
Battery	V/Ah	12/50
TANK CAPACITY		
Fuel	l	120
Hydraulic	l	130
BRAKES		
Service		Hydraulic acting on both axles
Parking		Hydraulic acting on the rear axles
APPROVALS		
Road approval (Italian)		Yes

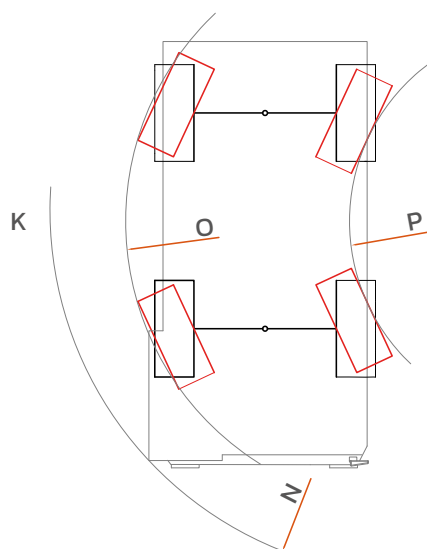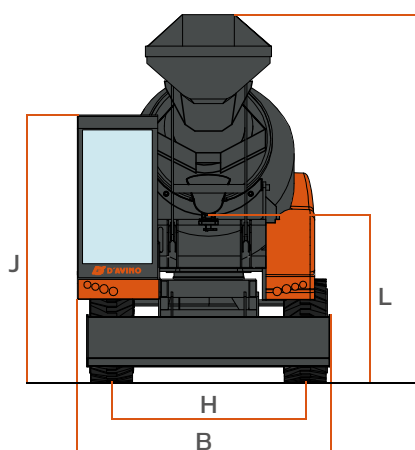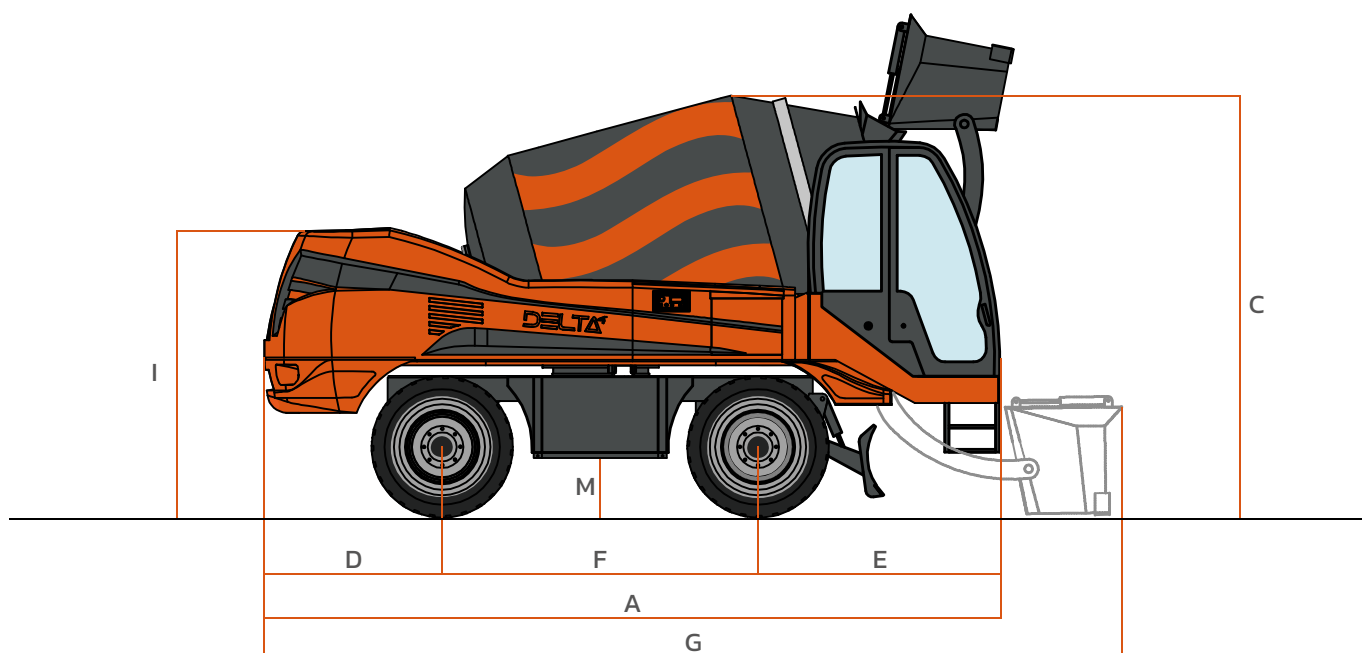

DELTA	
A	5420
B	2500
C	3270
D	1320
E	1700
F	2400
G	6845
H	1920
I	2160
J	2865
K	4180
L	1800
M	370
N	5120
O	4300
P	2000



Together. Stronger. Closer



AMOG srl | I-80031 Brusciano (NA) | Tel. +39 081 658 8361 | sales@davinogroup.biz

davinodumper.com

